

μ A739 • μ A749 Dual Audio Operational Amplifier / Preamplifier

Linear Products

Description

The μ A739 and μ A749 consist of two identical High-Gain Operational Amplifiers constructed on a single silicon chip using the Fairchild Planar epitaxial process. These 3-stage amplifiers use Class A PNP transistor output stages with uncommitted collectors. This enables a variety of loads to be employed for general purpose applications from dc to 10 MHz, where two high performance operational amplifiers are required. In addition, the outputs may be wired-OR for use as a dual comparator or they may function as diodes in low threshold rectifying circuits such as absolute value amplifiers, peak detectors, etc.

- SINGLE OR DUAL SUPPLY OPERATION
- LOW POWER CONSUMPTION
- HIGH GAIN, 25,000 V/V
- LARGE COMMON MODE RANGE, +11 V, -13 V
- EXCELLENT GAIN STABILITY VS. SUPPLY VOLTAGE
- NO LATCH-UP
- OUTPUT SHORT CIRCUIT PROTECTED


Absolute Maximum Ratings

| | |
|---|---|
| Supply Voltage | |
| (μ A749, μ A749C, μ A739) | ± 18 V |
| (μ 749D) | ± 12 V |
| Internal Power Dissipation (Note 1) | |
| Metal Package | 500 mW |
| DIP | 650 mW |
| Differential Input Voltage | ± 5 V |
| Input Voltage (Note 2) | |
| (μ A749, μ A749C, μ A739) | ± 15 V |
| (μ A749D) | ± 12 V |
| Storage Temperature Range | |
| Metal Package and Ceramic DIP | -65°C to $+150^{\circ}\text{C}$ |
| Molded DIP | -55°C to $+125^{\circ}\text{C}$ |
| Operating Temperature Range | 0°C to $+70^{\circ}\text{C}$ |
| Pin Temperature | |
| Metal Package, Ceramic DIP (Soldering, 60 s) | 300°C |
| Molded DIP (Soldering, 10 s) | 260°C |
| Output Short Circuit Duration, $T_A = 25^{\circ}\text{C}$ (Note 3) | 30 seconds |

Notes

1. Rating applies to ambient temperatures up to 70°C . Above 70°C ambient derate linearly at $8.3\text{ mW}/^{\circ}\text{C}$ for the Ceramic DIP.
2. For supply voltages less than ± 15 V, the absolute maximum input voltage is equal to the supply voltage.
3. Short circuit may be to ground or either supply.

Connection Diagram 8-Pin Metal Package




(Top View)

Pin 4 is connected to case.

Order Information

| Type | Package | Code | Part No. |
|-------------|---------|------|---------------|
| μ A749D | Metal | 5W | μ A749DHC |

Connection Diagram 14-Pin DIP

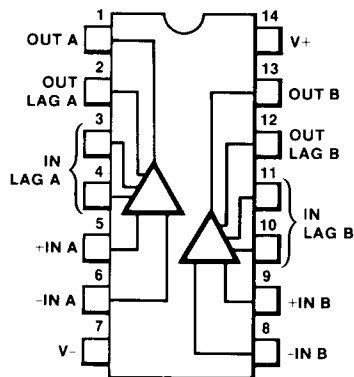


(Top View)

Order Information

| Type | Package | Code | Part No. |
|-------------|-------------|------|--------------|
| μ A739C | Ceramic DIP | 6A | μ A739DC |
| μ A739C | Molded DIP | 9A | μ A739PC |
| μ A749C | Ceramic DIP | 6A | μ A749DC |
| μ A749C | Molded DIP | 9A | μ A749PC |

Equivalent Circuit

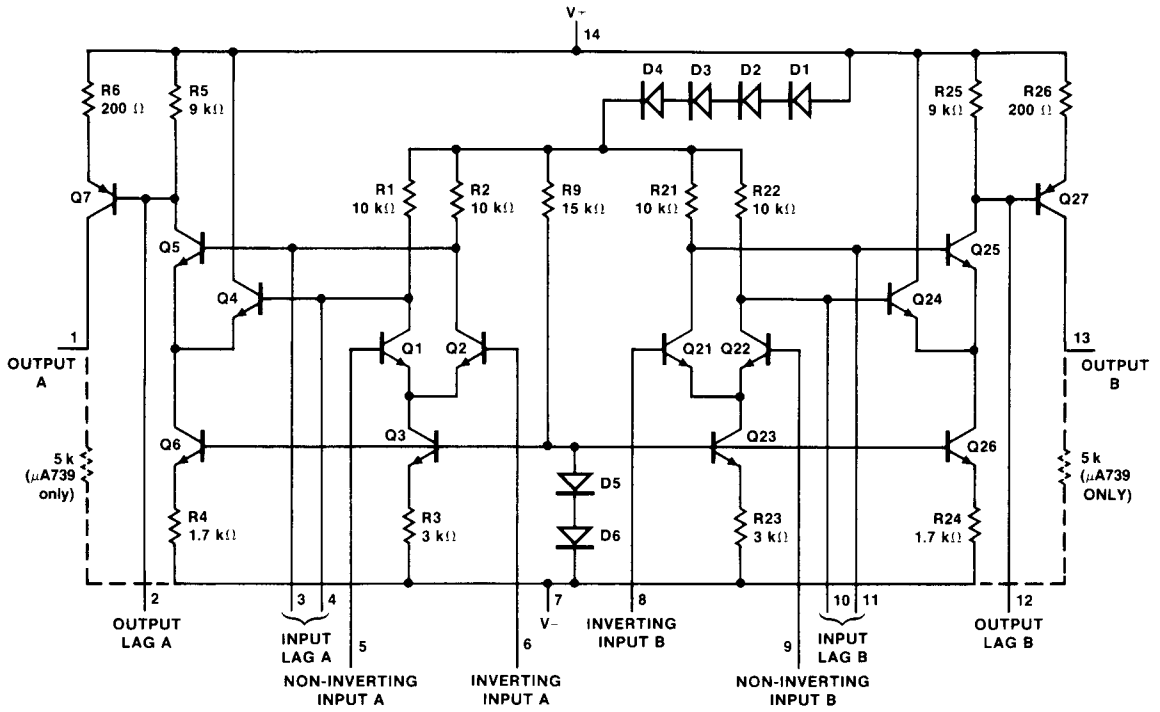

μA749C, μA749D and μA739E

Electrical Characteristics $V_+ = \pm 15\text{ V}$, $R_L = 5\text{ k}\Omega$ to Pin 7, $T_A = 25^\circ\text{C}$ unless otherwise specified

| Characteristic | Condition |
|---|--|
| Input Offset Voltage | $R_S = 200\ \Omega$ |
| Input Offset Current | |
| Input Bias Current | |
| Input Resistance | |
| Large Signal Voltage Gain | $V_{OUT} = \pm 10\text{ V}$ |
| Positive Output Voltage Swing | |
| Negative Output Voltage Swing | |
| Output Resistance | $f = 1.0\text{ kHz}$ |
| Common Mode Rejection Ratio | $R_S = 200\ \Omega$, $V_{IN} = +11.5\text{ V}$ to -13.5 V |
| Supply Voltage Rejection Ratio | $R_S = 200\ \Omega$ |
| Input Voltage Range | |
| Internal Power Dissipation | $V_{OUT} = 0$ |
| Supply Current | $V_{OUT} = 0$ |
| Broadband Noise Figure | $R_S = 10\text{ k}\Omega$, $BW = 10\text{ Hz}$ to 10 kHz |
| Turn On Delay (See Figure 3) | Open Loop, $V_{IN} = \pm 20\text{ mV}$ |
| Turn Off Delay (See Figure 3) | Open Loop, $V_{IN} = \pm 20\text{ mV}$ |
| Slew Rate (unity gain) (See Figure 2) | $C_1 = 0.02\ \mu\text{F}$, $R_1 = 33\ \Omega$, $C_2 = 10\ \text{pF}$ |
| Channel Separation (See Figure 4) | $R_S = 1\text{ k}\Omega$, $f = 10\text{ kHz}$ |
| The following specifications apply for $V_+ = \pm 4.0\text{ V}$, $R_L = 10\text{ k}\Omega$ to Pin 7, $T_A = 25^\circ\text{C}$ | |
| Input Offset Voltage | $R_S = 200\ \Omega$ |
| Input Offset Current | |
| Input Bias Current | |
| Supply Current | $V_{OUT} = 0$ |
| Internal Power Dissipation | $V_{OUT} = 0$ |
| Large Signal Voltage Gain | $V_{OUT} = \pm 2.0\text{ V}$ |
| Positive Output Voltage Swing | |
| Negative Output Voltage Swing | |
| The following specifications apply for $T_A = T_{HIGH}$ to T_{LOW} , $V_S = \pm 15\text{ V}$, $R_L = 5\text{ k}\Omega$ to Pin 7. | |
| Large Signal Voltage Gain | $V_{OUT} = \pm 10\text{ V}$, $T_A = \text{HIGH}$ |
| | $V_{OUT} = \pm 10\text{ V}$, $T_A = \text{LOW}$ |
| Positive Output Voltage Swing | |
| Negative Output Voltage Swing | |
| Input Offset Voltage | $R_S = 200\ \Omega$ |
| Input Offset Current | $T_A = \text{HIGH}$ |
| | $T_A = \text{LOW}$ |
| Input Bias Current | $T_A = \text{HIGH}$ |
| | $T_A = \text{LOW}$ |
| Input Offset Voltage Drift | $R_S = 200\ \Omega$, $+25^\circ\text{C} \leq T_A \leq \text{HIGH}$ |
| | $R_S = 200\ \Omega$, $\text{LOW} \leq T_A \leq +25^\circ\text{C}$ |

| μA749C | | | μA749D V _{CC} = ±6 V R _L = 10 K | | | μA739C | | | Units |
|--------|--------|-----|--|--------|------|--------|--------|------|-------|
| Min | Typ | Max | Min | Typ | Max | Min | Typ | Max | |
| | 1.0 | 6.0 | | 1.0 | 10 | | 1.0 | 6.0 | mV |
| | 50 | 750 | | 50 | 600 | | 50 | 1000 | nA |
| | 0.3 | 1.5 | | 0.3 | 1.5 | | 0.3 | 2.0 | μA |
| 50 | 150 | | 50 | 150 | | 37 | 150 | | kΩ |
| 15,000 | 50,000 | | 10,000 | 20,000 | | 6,500 | 20,000 | | V/V |
| +12 | +13 | | +4.5 | +5.0 | | +12 | +13 | | V |
| -14 | -15 | | -5.5 | -6.0 | | -14 | -15 | | V |
| | 5.0 | | | 10 | | | 5.0 | | kΩ |
| 70 | 90 | | 70 | 90 | | 70 | 90 | | dB |
| | 50 | 350 | | 50 | 100 | | 50 | | μV/V |
| -13 | | +11 | -4 | | +2.5 | -10 | | +11 | V |
| | 180 | 330 | | | | | | | mW |
| | 9.0 | 14 | 2.0 | 3.0 | 4.5 | 9.0 | 14 | | mA |
| | 2.5 | | | 2.5 | | 2.0 | | | dB |
| | .2 | | | .2 | | .2 | | | μs |
| | .3 | | | .3 | | .3 | | | μs |
| | 1.0 | | | 1.0 | | 1.0 | | | V/μs |
| | 140 | | | 140 | | 140 | | | dB |

| | | | | | | | | | |
|--------|--------|-----|--|--|--|-------|--------|------|-----|
| | | 6.0 | | | | | 1.0 | 6.0 | mV |
| | 50 | 600 | | | | | 50 | 1000 | nA |
| | .3 | 1.5 | | | | | 300 | | μA |
| | 2.5 | | | | | | 2.5 | | mA |
| | 20 | | | | | | 20 | | mW |
| 15,000 | 60,000 | | | | | 2,500 | 15,000 | | V/V |
| +2.5 | +2.8 | | | | | +2.5 | +2.8 | | V |
| -3.6 | -4.0 | | | | | -3.6 | -4.0 | | V |

| | | | | | | | | | |
|--------|--------|-----|--|--|--|--|--|--|-------|
| 8,000 | 40,000 | | | | | | | | V/V |
| 15,000 | 50,000 | | | | | | | | V/V |
| +12 | +13 | | | | | | | | V |
| -14 | -15 | | | | | | | | V |
| | 1.0 | 9.0 | | | | | | | mV |
| | .05 | 1.5 | | | | | | | μA |
| | .05 | 1.5 | | | | | | | μA |
| | .3 | 3.0 | | | | | | | μA |
| | .3 | 3.0 | | | | | | | μA |
| | 3.0 | | | | | | | | μV/°C |
| | 3.0 | | | | | | | | μV/°C |

4

$\mu A749C$, $\mu A749D$ and $\mu A739C$

Electrical Characteristics (Cont.) $V_+ = \pm 15 V$, $R_L = 5 k\Omega$ to Pin 7, $T_A = 25^\circ C$ unless otherwise specified


| Characteristics | Condition |
|----------------------------|---------------------------------|
| Input Offset Current Drift | $+25^\circ C \leq T_A$ |
| Input Bias Current Drift | $LOW \leq T_A \leq +25^\circ C$ |
| Supply Current | $V_{OUT} = 0, T_A = HIGH$ |
| | $V_{OUT} = 0, T_A = LOW$ |
| Internal Power Dissipation | $V_{OUT} = 0, T_A = HIGH$ |
| | $V_{OUT} = 0, T_A = LOW$ |

The following specifications apply for T_{HIGH} to T_{LOW} , $V_S = \pm 4.5 V$, $R_L = 10 k\Omega$ to Pin 7.


| | |
|-------------------------------|------------------------------|
| Input Offset Voltage | $R_S = 200 \Omega$ |
| Input Offset Current | |
| Large Signal Voltage Gain | $V_{OUT} = \pm 2.0 V, T_A =$ |
| | $V_{OUT} = \pm 2.0 V, T_A =$ |
| Positive Output Voltage Swing | |
| Negative Output Voltage Swing | |

Typical Performance Curves for $\mu A749C$ and $\mu A739C$


Closed Loop Gain as a Function of Frequency




Open Loop Frequency Response Using Recommended Compensation Networks




Output Capability as a Function of Frequency and Compensation




Open Loop Phase Shift Without Compensation



Channel Separation as Function of Frequency




Change of AC Characteristics With Temperature




| μA749C | | | μA749D $V_{CC} = \pm 6V$ $R_L = 10K$ | | | μA739C | | | Units |
|--------|------|-------|---|-----|-----|--------|-----|-----|-------|
| Min | Typ | Max | Min | Typ | Max | Min | Typ | Max | |
| | .5 | | | | | | | | nA/°C |
| | 2.0 | | | | | | | | nA/°C |
| | 4.0 | | | | | | | | nA/°C |
| | 10 | | | | | | | | mA |
| | 10 | | | | | | | | mA |
| | 100 | | | | | | | | mW |
| | 200 | | | | | | | | mW |
| | 1.5 | 7.0 | | | | | | | mV |
| | 50 | 1,000 | | | | | | | nA |
| 8,000 | | | | | | | | | V/V |
| 15,000 | | | | | | | | | V/V |
| +2.5 | +2.8 | | | | | | | | V |
| -3.6 | -4.0 | | | | | | | | V |

Typical Performance Curves for μA749D


Closed Loop Gain as a Function of Frequency




Open Loop Frequency Response Using Recommended Compensation Networks




Output Voltage Swing as a Function of Frequency for Various Compensation Networks




Open Loop Voltage Gain As a Function of Supply Voltage



Open Loop Voltage Gain As a Function of Load Resistance




Typical Output Voltage As a Function of Supply Voltage




Typical Performance Curves for $\mu A749D$ (Cont.)


Open Loop Gain As a Function of Temperature



Total Supply Current As a Function of Supply Voltage




Total Power Dissipation As a Function of Supply Voltage and Load




Typical Performance Curves for $\mu A749$ and $\mu A749C$


Common Mode Range As a Function of Supply Voltage




Input Noise Voltage as a Function of Frequency




Input Noise Current as a Function of Frequency




Absolute Maximum Power Dissipation as a Function of Temperature



Open Loop 180° Phase Shift Frequency as a Function of Supply Voltage




Common Mode Range as a Function of Supply Voltage




Typical Performance Curves for $\mu A749$ and $\mu A749C$ (Cont.)


Typical Output Voltage as a Function of Supply Voltage




Open Loop Voltage Gain as a Function of Load Resistance




Total Supply Current as a Function of Supply Voltage




Total Power Dissipation as a Function of Supply Voltage and Load



Open Loop Voltage Gain as a Function of Supply Voltage




Open Loop Gain as a Function of Temperature




Typical Performance Curves for $\mu A739C$


Input Offset Current and Bias Current as Functions of Temperature



Input Noise Voltage as a Function of Frequency




Input Noise Current as a Function of Frequency




Typical Performance Curves for $\mu A739C$ (Cont.)


Wide Band Input Noise Voltage as a Function of Temperature




Wide Band Input Noise Current as a Function of Temperature




Common Mode Range as a Function of Supply Voltage




Typical Output Voltage as a Function of Supply Voltage




Output Capability as a Function of Supply Voltage




Total Supply Current as a Function of Supply Voltage




Total Power Dissipation as a Function of Supply Voltage and Load



Open Loop Voltage Gain as a Function of Supply Voltage




Open Loop Gain as a Function of Temperature




Typical Performance Curves for μ A739C (Cont.)

Input Offset Current and Bias Current as a Function of Temperature



Typical Applications

Stereo Phono Preamplifier—RIAA Equalized


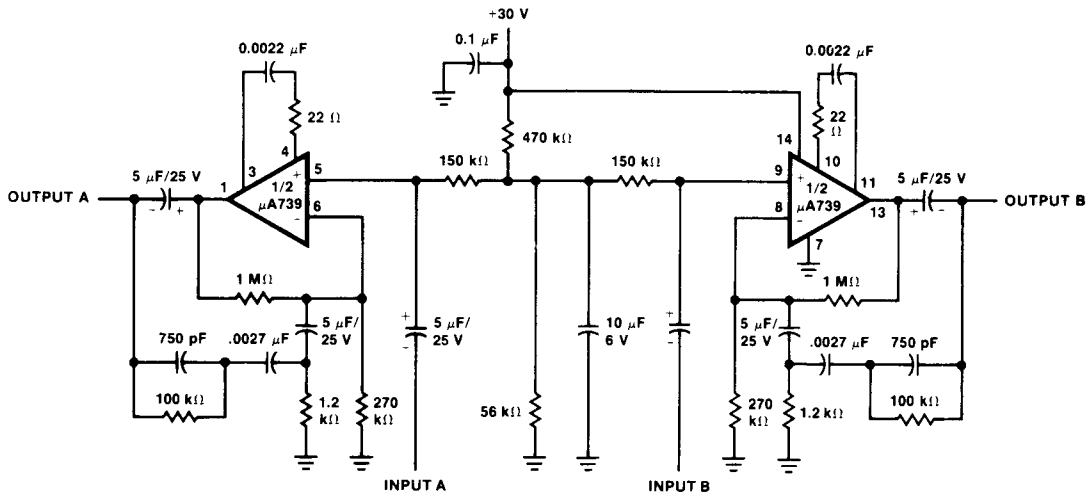


Typical Performance

- Gain 40 dB at 1 kHz, RIAA equalized
- Input overload point, 80 mV rms
- Noise Level, 2 μV referred to input
- Signal to noise ratio, 74 dB below 10 mW
- Channel separation @ 1 kHz, 80 dB

Typical Applications (Cont.)

Stereo Tape Preamplifier

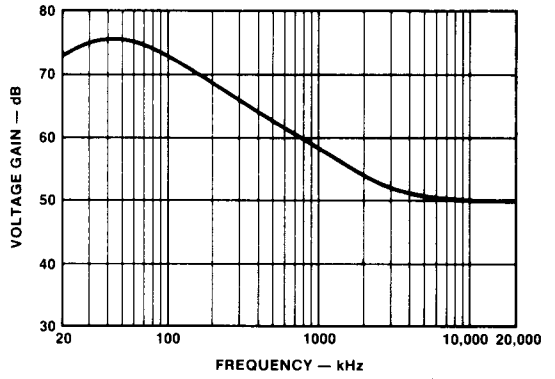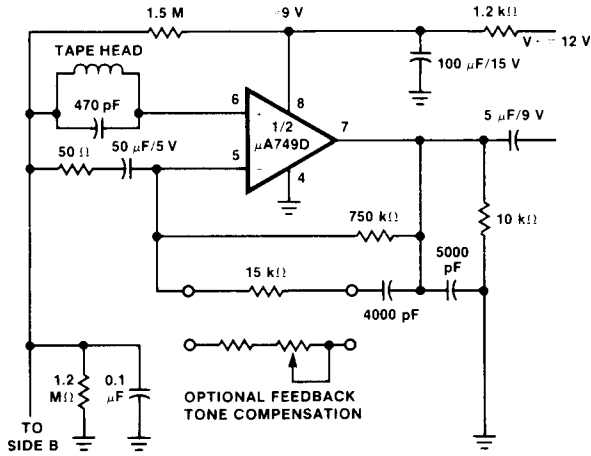

Typical Performance

| | |
|----------------------|-----------|
| Gain at 1 kHz | 60 dB |
| Output Voltage Swing | 2.8 V rms |
| Power Consumption | 30 mW |